


## Etaprime – Self-priming Pump

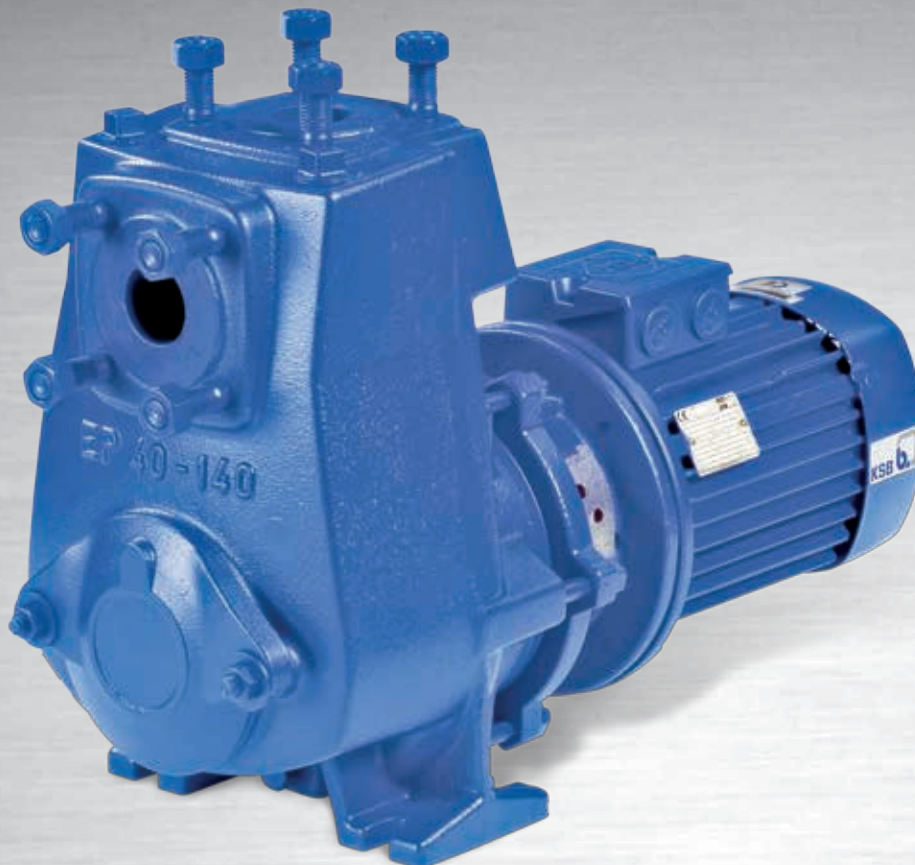


Etaprime B/BN

### Applications:

- Water supply
- Fire-fighting systems
- Spray irrigation
- General irrigation
- Drainage
- Cooling water
- Air-conditioning systems
- Drinking water
- Service water
- Swimming pool water
- Seawater
- Fire-fighting water
- Brackish water
- Condensate
- Brine
- Oils
- Cleaning agents

### More information:

[www.ksb.com/products](http://www.ksb.com/products)

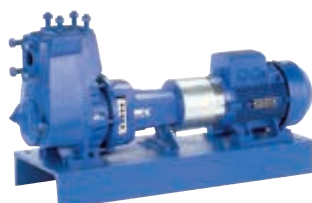


Etaprime L

Your contact:



# Etapprime – Self-priming Pump

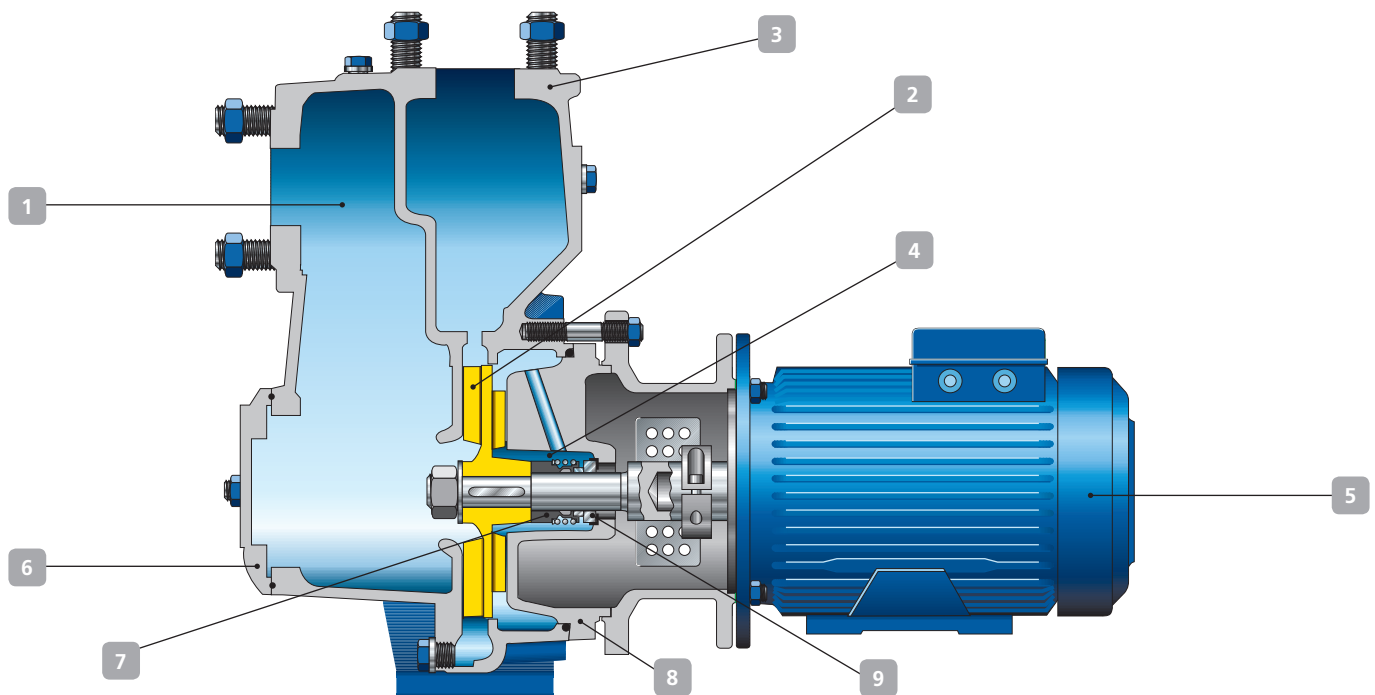

## 1 Self-priming

after the pump casing has been filled with the fluid handled.

## 2 Excellent suction behaviour

Self-priming up to 9 m. No foot valve required.

## 2 Insensitive

to the penetration of gas and air.

## 4 Double-acting mechanical seal

available for tough applications.

## 5 Service-friendly

thanks to robust KSB-IEC three-phase motor.

## 6 Easy to clean

via inspection cover.

## 7 Wear-resistant

Shaft sleeve prevents wear on the shaft.

## 8 Simple dismantling

Back pull-out design: The casing may remain in the piping while the pump is dismantled.

## 9 Operating reliability

Maintenance-free mechanical seal.

### Materials

Cast iron, stainless steel

### Technical data

	Etapprime L	Etapprime B/BN
Max. capacity	180 m³/h	130 m³/h
Max. discharge head	85 m	68 m
Fluid temperature	-30 to +90 °C	-30 to +90 °C
Pump discharge pressure		max. 10 bar



KSB Aktiengesellschaft  
Johann-Klein-Straße 9  
67227 Frankenthal (Germany)  
www.ksb.com